

# POWER STRIPS - INTERNATIONAL

## for CPI Rack and Cabinet Systems

### KEY FEATURES

- Distribute power to multiple devices from a single power connection
- Choice of plug and outlet styles to match site requirements
- Available with a master lighted switch or a thermal circuit breaker to protect circuits from overload
- Available with surge-protection to protect equipment from power spikes
- Available with local meters to provide easy voltage and current monitoring

### APPLICATIONS

- Power Strips distribute single-phase power to multiple pieces of equipment from a single power connection.


### USE WITH

- CPI Cabinet Systems
- CPI Rack Systems

### RELATED ACCESSORIES

- eConnect® Power Distribution Units (PDUs)
- Electronic Locking System (ELS)
- Remote Infrastructure Management System

**Availability: Europe, Middle East, Asia Pacific**

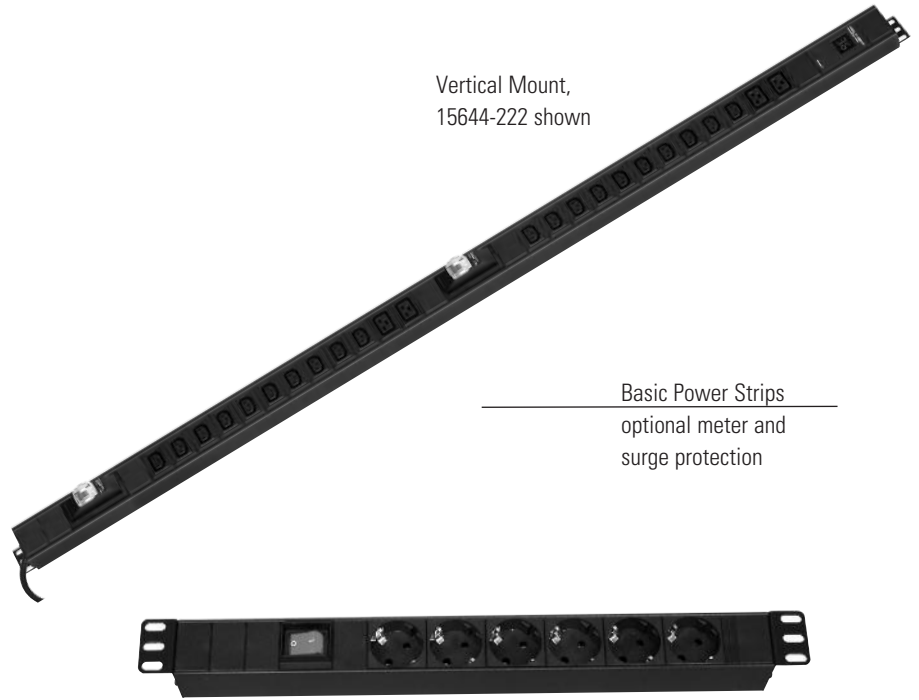

Vertical Mount,  
15644-222 shown

Basic Power Strips  
optional meter and  
surge protection

Horizontal Rack-Mount,  
15640-215 shown

CPI International Power Strips provide basic power distribution into racks and cabinets allowing you to share a single power connection with multiple pieces of equipment.

CPI International Power Strips are available in two configurations: basic and metered. Basic Power Strips feature a master lighted switch or optional thermal circuit breaker and surge protection. Circuit breakers limit the amount of current available to equipment while surge protection blocks excessive voltage from equipment. Both features are critical with unconditioned line power. Metered configurations include an in-line digital voltage and ammeter with display to show the amount of voltage and current being used by attached equipment. This feature allows the user to monitor voltage and current use and judge the amount of remaining capacity on the power strip before adding a new device to the circuit.

Choose vertical or horizontal rack-mount power strips that match the voltage and current rating of the power connection. Power strips have a mix of plug and outlet combinations.

See inside for product selection. Contact CPI Technical Support for configuration assistance.

**US & Canada**  
+1-800-834-4969  
Toronto, Ontario, Canada  
+905-850-7770  
chatsworth.com

**Latin America**  
+52-55-5203-7525  
Toll Free within Mexico  
01-800-01-7592  
chatsworth.com.co

**Europe**  
+44-1628-524-834  
chatsworthproducts.co.uk

**Middle East & Africa**  
Dubai, UAE  
+971-4-2602125  
chatsworth.ae


**Asia Pacific**  
+86 21 6880-0266  
chatsworth.com.cn

techsupport@chatsworth.com


**SPECIFICATIONS**

- Single-input, vertical and horizontal rack-mount power strips
- For indoor use only, in environmentally controlled areas, may not be used outdoors, in harsh environments or in air handling spaces
- Power Input:
  - Specific to Power Strip (see order tables)
  - Stated as maximum rated voltage and current of breaker/inlet/plug
  - 50/60 Hz
- Power Output:
  - Specific to Power Strip (see order table)
  - Same voltage/frequency as input
- Power Inlet/Plug:
  - Specific to Power Strip (see order table)
- Power Cord:
  - Attached, 10'L (3 m)
  - Not rated for plenum use
- Power Outlet Receptacles:
  - Specific to Power Strip (see order tables)
- Circuit Control:
  - Master lighted switch on horizontal rack-mount power strips
- Circuit Protection:
  - Thermal circuit breakers on vertical mount power strips
- Optional Surge Protection
  - 330 Volt, 1100 Joules
  - Surge suppression active indicator LED
- Voltage and Current Metering:
  - Digital voltage and ammeter included on metered power strips
  - Each voltage and ammeter has a 3-digit LED display
  - Voltage meter has 1VA resolution, ±1% accuracy
  - Ammeter has 0.1A resolution, ±1% accuracy
  - Overload alarm/flashing LED at breaker rating
  - The button near the display toggles voltage and current display and can activate/deactivate the alarm function
- Certifications:
  - CE Marked
- Mounting hardware/brackets:
  - Horizontal rack-mount power strips include mounting brackets for 19" EIA and 23" wide racks
  - Vertical mount power strips include tool-less buttons; order mounting brackets separately
  - Use Vertical PDU Mounting Bracket Kit (P/N 35700-701) to mount power strips on CPI Rack Systems
  - Use the Full Height Wide PDU Bracket (P/N 39221-XXX) to mount power strips inside CPI F-Series TeraFrame Gen 3 Cabinets, N-Series TeraFrame Gen 3 Cabinets and GF-Series GlobalFrame Gen 2 Cabinets
  - On 43.1"H (1095 mm), 48.3"H (1227 mm) and 53.4"H (1357 mm) Power Strips, Tool-less buttons are spaced 36.75" (933 mm) apart
  - On 61.0"H (1549 mm) and 61.3"H (1557 mm) Power Strips, Tool-less buttons are spaced 57.75" (1467 mm) apart
  - On 64.8"H (1646 mm) and 66.5"H (1689 mm) Power Strips, Tool-less buttons are spaced 61.25" (1556 mm) apart
- Finish: Black only


**PLUG & RECEPTACLE CONFIGURATIONS**

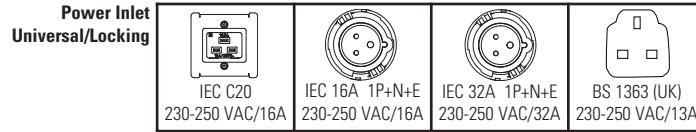

**POWER RECEPTACLE/OUTLET TABLE:**

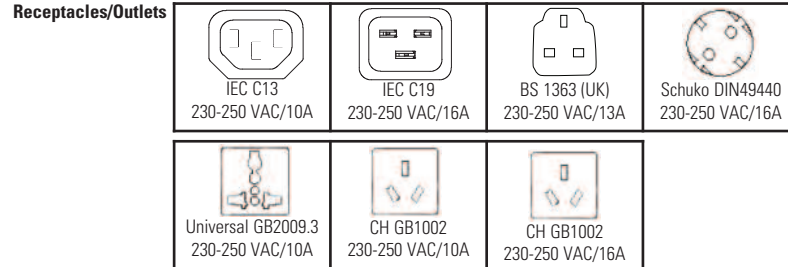

**ACCESSORIES**



35700-701

**Vertical PDU Mounting Bracket Kit**

Used to attach Vertical PDUs and Power Strips to CPI Rack Systems.

- Each Mounting Bracket Kit includes a pair of mounting brackets to support the PDU or Power Strip.
- Bracket attaches to the mounting rail and extends from 8.5"D (216 mm) to 12"D (305 mm)

Part Number	Description	Shipping Weight lb (kg)
35700-701	Vertical Mounting Brackets (2)	2 (0.9)



**Full Height Dual Wide PDU Bracket**

Full Height Dual Wide PDU Bracket supports two vertical PDUs or Power Strips side-by-side and has multiple slots for CPI Saf-T-Grip® Straps or tie wraps to secure cords to the bracket.

- Attaches to F-Series TeraFrame Gen 3 Cabinet, N-Series TeraFrame Gen 3 Cabinet or GF-Series GlobalFrame Gen 2 Cabinet, adjusts in depth independent of the mounting rails
- Wide bracket is 5.8"W (147 mm) and supports two PDUs or power strips up to 2.7"W (69 mm) side-by-side
- Tool-less mounting on 36.75" (933 mm), 57.75" (1467 mm) and 61.25" (1556 mm) centers to match Vertical Power Strips
- Select part number to match the usable height and color of the cabinet

Part Number	Height (U)	Shipping Weight lb (kg)
39221-X00	42	10 (4.5)
39221-X01	43	10 (4.5)
39221-X02	44	11 (5.0)
39221-X03	45	11 (5.0)
39221-X04	46	11 (5.0)
39221-X05	47	12 (5.4)
39221-X06	48	12 (5.4)
39221-X07	49	12 (5.4)
39221-X08	50	12 (5.4)
39221-X09	51	12 (5.4)
39221-X10	52	13 (5.9)

X=color: C=Black, E=Glacier White.

ORDERING INFORMATION

**Basic Power Strips, Vertical Mount**

Part Number	Input			Output		Dims - in (mm)		
	Amp	kW	Plug	Breakers	Outlets	H	W	D
<b>220-250 Volt, Single-Phase Power Strip</b>								
15642-202	16	4.0	IEC C20	1 x 16A	(10) C13, (4) C19	43.1 (1095)	2.5 (64)	1.8 (46)
15642-206	16	4.0	IEC C20	1 x 16A	(12) UK BS1363 13A	48.3 (1227)	2.5 (64)	1.8 (46)
15642-212	16	4.0	IEC 16A 1P+N+E	1 x 16A	(10) C13, (4) C19	43.1 (1095)	2.5 (64)	1.8 (46)
15642-216	16	4.0	IEC 16A 1P+N+E	1 x 16A	(12) UK BS1363 13A	48.3 (1227)	2.5 (64)	1.8 (46)
15642-222	32	8.0	IEC 32A 1P+N+E	2 x 16A	(10) C13, (4) C19	48.3 (1227)	2.5 (64)	1.8 (46)
15642-226	32	8.0	IEC 32A 1P+N+E	2 x 16A	(12) UK BS1363 13A	53.4 (1357)	2.5 (64)	1.8 (46)
15642-232	13	3.3	UK BS1363	1 x 13A	(10) C13, (4) C19	43.1 (1095)	2.5 (64)	1.8 (46)
15642-236	13	3.3	UK BS1363	1 x 13A	(12) UK BS1363 13A	48.3 (1227)	2.5 (64)	1.8 (46)
15644-202	16	4.0	IEC C20	1 x 16A	(20) C13, (4) C19	61.3 (1557)	2.5 (64)	1.8 (46)
15644-205	16	4.0	IEC C20	1 x 16A	(24) Schuko DIN49440 16A	61.0 (1549)	1.8 (46)	2.7 (69)
15644-207	16	4.0	IEC C20	1 x 16A	(24) Universal GB2009.3 10A	61.3 (1557)	2.5 (64)	1.8 (46)
15644-208	16	4.0	IEC C20	1 x 16A	(20) CH GB1002 10A, (4) 16A	61.3 (1557)	2.5 (64)	1.8 (46)
15644-212	16	4.0	IEC 16A 1P+N+E	1 x 16A	(20) C13, (4) C19	61.3 (1557)	2.5 (64)	1.8 (46)
15644-215	16	4.0	IEC 16A 1P+N+E	1 x 16A	(24) Schuko DIN49440 16A	61.0 (1549)	1.8 (46)	2.7 (69)
15644-217	16	4.0	IEC 16A 1P+N+E	1 x 16A	(24) Universal GB2009.3 10A	61.3 (1557)	2.5 (64)	1.8 (46)
15644-218	16	4.0	IEC 16A 1P+N+E	1 x 16A	(20) CH GB1002 10A, (4) 16A	61.3 (1557)	2.5 (64)	1.8 (46)
15644-222	32	8.0	IEC 32A 1P+N+E	2 x 16A	(20) C13, (4) C19	66.5 (1689)	2.5 (64)	1.8 (46)
15644-225	32	8.0	IEC 32A 1P+N+E	2 x 16A	(24) Schuko DIN49440 16A	64.8 (1646)	1.8 (46)	2.7 (69)
15644-227	32	8.0	IEC 32A 1P+N+E	2 x 16A	(24) Universal GB2009.3 10A	66.5 (1689)	2.5 (64)	1.8 (46)
15644-228	32	8.0	IEC 32A 1P+N+E	2 x 16A	(20) CH GB1002 10A, (4) 16A	66.5 (1689)	2.5 (64)	1.8 (46)
15644-232	13	3.3	UK BS1363	1 x 13A	(20) C13, (4) C19	61.3 (1557)	2.5 (64)	1.8 (46)
15644-237	13	3.3	UK BS1363	1 x 13A	(24) Universal GB2009.3 10A	61.3 (1557)	2.5 (64)	1.8 (46)
<b>220-250 Volt, Single-Phase Power Strip, Surge-Protected</b>								
15642-102	16	4.0	IEC C20	1 x 16A	(10) C13, (4) C19	43.1 (1095)	2.5 (64)	1.8 (46)
15642-106	16	4.0	IEC C20	1 x 16A	(12) UK BS1363 13A	48.3 (1227)	2.5 (64)	1.8 (46)
15642-112	16	4.0	IEC 16A 1P+N+E	1 x 16A	(10) C13, (4) C19	43.1 (1095)	2.5 (64)	1.8 (46)
15642-116	16	4.0	IEC 16A 1P+N+E	1 x 16A	(12) UK BS1363 13A	48.3 (1227)	2.5 (64)	1.8 (46)
15642-122	32	8.0	IEC 32A 1P+N+E	2 x 16A	(10) C13, (4) C19	48.3 (1227)	2.5 (64)	1.8 (46)
15642-126	32	8.0	IEC 32A 1P+N+E	2 x 16A	(12) UK BS1363 13A	53.4 (1357)	2.5 (64)	1.8 (46)
15642-132	13	3.3	UK BS1363	1 x 13A	(10) C13, (4) C19	43.1 (1095)	2.5 (64)	1.8 (46)
15642-136	13	3.3	UK BS1363	1 x 13A	(12) UK BS1363 13A	48.3 (1227)	2.5 (64)	1.8 (46)
15644-102	16	4.0	IEC C20	1 x 16A	(20) C13, (4) C19	61.3 (1557)	2.5 (64)	1.8 (46)
15644-105	16	4.0	IEC C20	1 x 16A	(24) Schuko DIN49440 16A	61.0 (1549)	1.8 (46)	2.7 (69)
15644-107	16	4.0	IEC C20	1 x 16A	(24) Universal GB2009.3 10A	61.3 (1557)	2.5 (64)	1.8 (46)
15644-108	16	4.0	IEC C20	1 x 16A	(20) CH GB1002 10A, (4) 16A	61.3 (1557)	2.5 (64)	1.8 (46)
15644-112	16	4.0	IEC 16A 1P+N+E	1 x 16A	(20) C13, (4) C19	61.3 (1557)	2.5 (64)	1.8 (46)
15644-115	16	4.0	IEC 16A 1P+N+E	1 x 16A	(24) Schuko DIN49440 16A	61.0 (1549)	1.8 (46)	2.7 (69)
15644-117	16	4.0	IEC 16A 1P+N+E	1 x 16A	(24) Universal GB2009.3 10A	61.3 (1557)	2.5 (64)	1.8 (46)
15644-118	16	4.0	IEC 16A 1P+N+E	1 x 16A	(20) CH GB1002 10A, (4) 16A	61.3 (1557)	2.5 (64)	1.8 (46)
15644-122	32	8.0	IEC 32A 1P+N+E	2 x 16A	(20) C13, (4) C19	66.5 (1689)	2.5 (64)	1.8 (46)
15644-125	32	8.0	IEC 32A 1P+N+E	2 x 16A	(24) Schuko DIN49440 16A	64.8 (1646)	1.8 (46)	2.7 (69)
15644-127	32	8.0	IEC 32A 1P+N+E	2 x 16A	(24) Universal GB2009.3 10A	66.5 (1689)	2.5 (64)	1.8 (46)
15644-128	32	8.0	IEC 32A 1P+N+E	2 x 16A	(20) CH GB1002 10A, (4) 16A	66.5 (1689)	2.5 (64)	1.8 (46)
15644-132	13	3.3	UK BS1363	1 x 13A	(20) C13, (4) C19	61.3 (1557)	2.5 (64)	1.8 (46)
15644-137	13	3.3	UK BS1363	1 x 13A	(24) Universal GB2009.3 10A	61.3 (1557)	2.5 (64)	1.8 (46)

Notes: All power strips have attached 10'L (3 m) power cord.

ORDERING INFORMATION

**Metered Power Strips, Vertical Mount**

Part Number	Input			Output		Dims - in (mm)		
	Amp	kW	Plug	Breakers	Outlets	H	W	D
<b>220-250 Volt, Single-Phase Power Strip</b>								
15643-202	16	4.0	IEC C20	1 x 16A	(10) C13, (4) C19	43.1 (1095)	2.5 (64)	1.8 (46)
15643-206	16	4.0	IEC C20	1 x 16A	(12) UK BS1363 13A	48.3 (1227)	2.5 (64)	1.8 (46)
15643-212	16	4.0	IEC 16A 1P+N+E	1 x 16A	(10) C13, (4) C19	43.1 (1095)	2.5 (64)	1.8 (46)
15643-216	16	4.0	IEC 16A 1P+N+E	1 x 16A	(12) UK BS1363 13A	48.3 (1227)	2.5 (64)	1.8 (46)
15643-222	32	8.0	IEC 32A 1P+N+E	2 x 16A	(10) C13, (4) C19	48.3 (1227)	2.5 (64)	1.8 (46)
15643-226	32	8.0	IEC 32A 1P+N+E	2 x 16A	(12) UK BS1363 13A	53.4 (1357)	2.5 (64)	1.8 (46)
15643-232	13	3.3	UK BS1363	1 x 13A	(10) C13, (4) C19	43.1 (1095)	2.5 (64)	1.8 (46)
15643-236	13	3.3	UK BS1363	1 x 13A	(12) UK BS1363 13A	48.3 (1227)	2.5 (64)	1.8 (46)
15645-202	16	4.0	IEC C20	1 x 16A	(20) C13, (4) C19	61.3 (1557)	2.5 (64)	1.8 (46)
15645-205	16	4.0	IEC C20	1 x 16A	(24) Schuko DIN49440 16A	61.0 (1549)	1.8 (46)	2.7 (69)
15645-207	16	4.0	IEC C20	1 x 16A	(24) Universal GB2009.3 10A	61.3 (1557)	2.5 (64)	1.8 (46)
15645-208	16	4.0	IEC C20	1 x 16A	(20) CH GB1002 10A, (4) 16A	61.3 (1557)	2.5 (64)	1.8 (46)
15645-212	16	4.0	IEC 16A 1P+N+E	1 x 16A	(20) C13, (4) C19	61.3 (1557)	2.5 (64)	1.8 (46)
15645-215	16	4.0	IEC 16A 1P+N+E	1 x 16A	(24) Schuko DIN49440 16A	61.0 (1549)	1.8 (46)	2.7 (69)
15645-217	16	4.0	IEC 16A 1P+N+E	1 x 16A	(24) Universal GB2009.3 10A	61.3 (1557)	2.5 (64)	1.8 (46)
15645-218	16	4.0	IEC 16A 1P+N+E	1 x 16A	(20) CH GB1002 10A, (4) 16A	61.3 (1557)	2.5 (64)	1.8 (46)
15645-222	32	8.0	IEC 32A 1P+N+E	2 x 16A	(20) C13, (4) C19	66.5 (1689)	2.5 (64)	1.8 (46)
15645-225	32	8.0	IEC 32A 1P+N+E	2 x 16A	(24) Schuko DIN49440 16A	64.8 (1646)	1.8 (46)	2.7 (69)
15645-227	32	8.0	IEC 32A 1P+N+E	2 x 16A	(24) Universal GB2009.3 10A	66.5 (1689)	2.5 (64)	1.8 (46)
15645-228	32	8.0	IEC 32A 1P+N+E	2 x 16A	(20) CH GB1002 10A, (4) 16A	66.5 (1689)	2.5 (64)	1.8 (46)
15645-232	13	3.3	UK BS1363	1 x 13A	(20) C13, (4) C19	61.3 (1557)	2.5 (64)	1.8 (46)
15645-237	13	3.3	UK BS1363	1 x 13A	(24) Universal GB2009.3 10A	61.3 (1557)	2.5 (64)	1.8 (46)
<b>220-250 Volt, Single-Phase Power Strip, Surge-Protected</b>								
15643-102	16	4.0	IEC C20	1 x 16A	(10) C13, (4) C19	43.1 (1095)	2.5 (64)	1.8 (46)
15643-106	16	4.0	IEC C20	1 x 16A	(12) UK BS1363 13A	48.3 (1227)	2.5 (64)	1.8 (46)
15643-112	16	4.0	IEC 16A 1P+N+E	1 x 16A	(10) C13, (4) C19	43.1 (1095)	2.5 (64)	1.8 (46)
15643-116	16	4.0	IEC 16A 1P+N+E	1 x 16A	(12) UK BS1363 13A	48.3 (1227)	2.5 (64)	1.8 (46)
15643-122	32	8.0	IEC 32A 1P+N+E	2 x 16A	(10) C13, (4) C19	48.3 (1227)	2.5 (64)	1.8 (46)
15643-126	32	8.0	IEC 32A 1P+N+E	2 x 16A	(12) UK BS1363 13A	53.4 (1357)	2.5 (64)	1.8 (46)
15643-132	13	3.3	UK BS1363	1 x 13A	(10) C13, (4) C19	43.1 (1095)	2.5 (64)	1.8 (46)
15643-136	13	3.3	UK BS1363	1 x 13A	(12) UK BS1363 13A	48.3 (1227)	2.5 (64)	1.8 (46)
15645-102	16	4.0	IEC C20	1 x 16A	(20) C13, (4) C19	61.3 (1557)	2.5 (64)	1.8 (46)
15645-105	16	4.0	IEC C20	1 x 16A	(24) Schuko DIN49440 16A	61.0 (1549)	1.8 (46)	2.7 (69)
15645-107	16	4.0	IEC C20	1 x 16A	(24) Universal GB2009.3 10A	61.3 (1557)	2.5 (64)	1.8 (46)
15645-108	16	4.0	IEC C20	1 x 16A	(20) CH GB1002 10A, (4) 16A	61.3 (1557)	2.5 (64)	1.8 (46)
15645-112	16	4.0	IEC 16A 1P+N+E	1 x 16A	(20) C13, (4) C19	61.3 (1557)	2.5 (64)	1.8 (46)
15645-115	16	4.0	IEC 16A 1P+N+E	1 x 16A	(24) Schuko DIN49440 16A	61.0 (1549)	1.8 (46)	2.7 (69)
15645-117	16	4.0	IEC 16A 1P+N+E	1 x 16A	(24) Universal GB2009.3 10A	61.3 (1557)	2.5 (64)	1.8 (46)
15645-118	16	4.0	IEC 16A 1P+N+E	1 x 16A	(20) CH GB1002 10A, (4) 16A	61.3 (1557)	2.5 (64)	1.8 (46)
15645-122	32	8.0	IEC 32A 1P+N+E	2 x 16A	(20) C13, (4) C19	66.5 (1689)	2.5 (64)	1.8 (46)
15645-125	32	8.0	IEC 32A 1P+N+E	2 x 16A	(24) Schuko DIN49440 16A	64.8 (1646)	1.8 (46)	2.7 (69)
15645-127	32	8.0	IEC 32A 1P+N+E	2 x 16A	(24) Universal GB2009.3 10A	66.5 (1689)	2.5 (64)	1.8 (46)
15645-128	32	8.0	IEC 32A 1P+N+E	2 x 16A	(20) CH GB1002 10A, (4) 16A	66.5 (1689)	2.5 (64)	1.8 (46)
15645-132	13	3.3	UK BS1363	1 x 13A	(20) C13, (4) C19	61.3 (1557)	2.5 (64)	1.8 (46)
15645-137	13	3.3	UK BS1363	1 x 13A	(24) Universal GB2009.3 10A	61.3 (1557)	2.5 (64)	1.8 (46)

Notes: All power strips have attached 10'L (3 m) power cord.

ORDERING INFORMATION

Basic Power Strips, Horizontal Rack-Mount

Part Number	Input			Output		Dims - in (mm)		
	Amp	kW	Plug	Control	Outlets	H	W	D
<b>220-250 Volt, Single-Phase Power Strip</b>								
15640-201	16	4.0	IEC C20	Master Lighted Switch	(10) C13	1U	19"EIA/23"	1.8 (46)
15640-202	16	4.0	IEC C20	Master Lighted Switch	(6) C13, (4) C19	1U	19"EIA/23"	4.6 (117)
15640-203	16	4.0	IEC C20	Master Lighted Switch	(4) C19	1U	19"EIA/23"	1.8 (46)
15640-204	16	4.0	IEC C20	Master Lighted Switch	(6) CH GB1002 10A	1U	19"EIA/23"	1.8 (46)
15640-205	16	4.0	IEC C20	Master Lighted Switch	(6) Schuko DIN49440 16A	1U	19"EIA/23"	1.8 (46)
15640-206	16	4.0	IEC C20	Master Lighted Switch	(6) UK BS1363 13A	1U	19"EIA/23"	1.8 (46)
15640-207	16	4.0	IEC C20	Master Lighted Switch	(6) Universal GB2009.3 10A	1U	19"EIA/23"	1.8 (46)
15640-211	16	4.0	IEC 16A 1P+N+E	Master Lighted Switch	(10) C13	1U	19"EIA/23"	1.8 (46)
15640-212	16	4.0	IEC 16A 1P+N+E	Master Lighted Switch	(6) C13, (4) C19	1U	19"EIA/23"	4.6 (117)
15640-213	16	4.0	IEC 16A 1P+N+E	Master Lighted Switch	(4) C19	1U	19"EIA/23"	1.8 (46)
15640-214	16	4.0	IEC 16A 1P+N+E	Master Lighted Switch	(6) CH GB1002 10A	1U	19"EIA/23"	1.8 (46)
15640-215	16	4.0	IEC 16A 1P+N+E	Master Lighted Switch	(6) Schuko DIN49440 16A	1U	19"EIA/23"	1.8 (46)
15640-216	16	4.0	IEC 16A 1P+N+E	Master Lighted Switch	(6) UK BS1363 13A	1U	19"EIA/23"	1.8 (46)
15640-217	16	4.0	IEC 16A 1P+N+E	Master Lighted Switch	(6) Universal GB2009.3 10A	1U	19"EIA/23"	1.8 (46)
15640-231	13	3.3	UK BS1363	Master Lighted Switch	(10) C13	1U	19"EIA/23"	1.8 (46)
15640-232	13	3.3	UK BS1363	Master Lighted Switch	(6) C13, (4) C19	1U	19"EIA/23"	4.6 (117)
15640-236	13	3.3	UK BS1363	Master Lighted Switch	(6) UK BS1363 13A	1U	19"EIA/23"	1.8 (46)

Notes: Includes 19"EIA and 23"W horizontal rack-mount brackets. All power strips have a lighted master switch (no breaker) and an attached 10'L (3 m) cord.



15640-211 shown



15640-236 shown