

# Installation Instructions

## RMR ENCLOSURE DRIP SHIELD ASSEMBLY

### Safety Information



**WARNING:** Improper use of this product may lead to serious injury. Read and understand all instructions for proper installation and use of this product.

### Intended Use

The Drip Shield is intended to provide additional environmental protection to enclosures used outdoors, especially from rain and ice. Addition of the Drip Shield and a drain (add Drain Kit for ideal solution) to a NEMA Type 12 Enclosure allows it to be used in NEMA Type 3R (outdoor) applications. It is also recommended for NEMA Type 4 enclosures in outdoor applications in order to improve protection.

### Tools Required


Drill  
6.2mm drill bit  
4mm hex driver

### Included Hardware (Quantities vary based on width of enclosure)

M6 button head screws  
Sealing washers  
Flange nuts

### Assembly Sequence

1. Place drip shield in orientation shown.
2. Use drip shield as a template to drill holes for screws using 6.2mm drill bit.
3. Install M6 screws on top and washer and nuts onto screws from inside the enclosure, with rubber side of washer against the enclosure. Tighten until drip shield is fully seated. (Torque 88 IN-LB [9.9 N-M]).

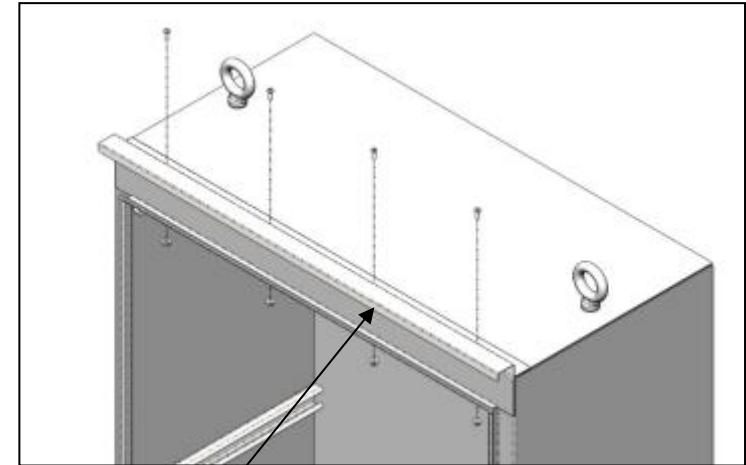


Drip Shield

M6 Screw

Washer

Nut

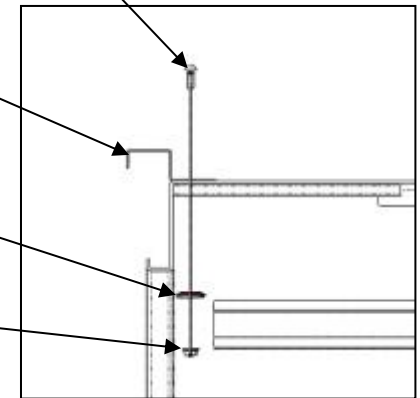

IIS-738081, 02/01/2017, Rev. 1, CPI/BMO

800-834-4969 (USA & Canada) • [www.chatsworth.com](http://www.chatsworth.com) • [techsupport@chatsworth.com](mailto:techsupport@chatsworth.com)

For international phone numbers, see our website or contact CPI Tech Support.

*This drawing contains proprietary and confidential information and is protected by U.S. and international law. Unauthorized reproduction, disclosure or use of the drawing or the information therein is expressly forbidden except as agreed to in writing by Chatsworth Products, Inc.*